

Figure 1b

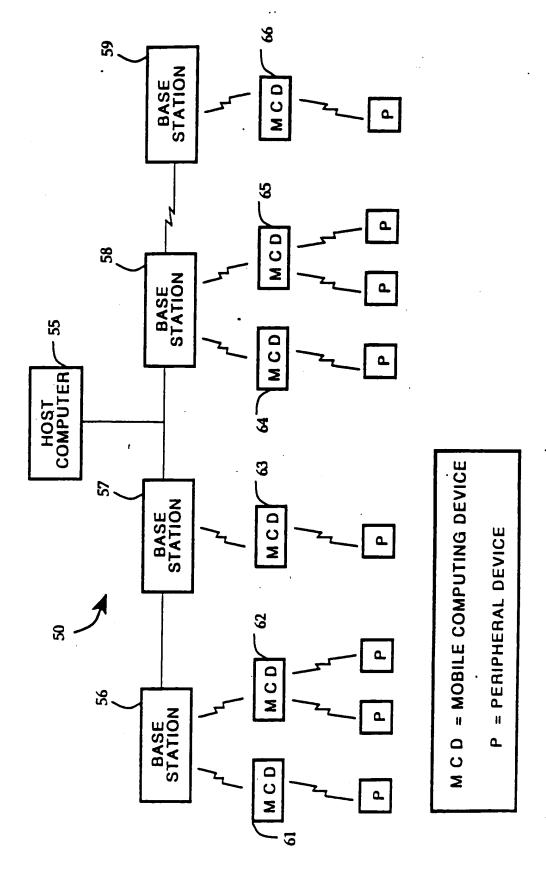


Figure 1c

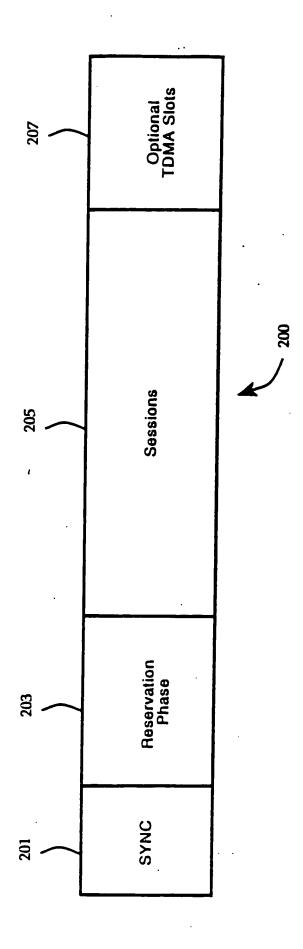


Figure 2

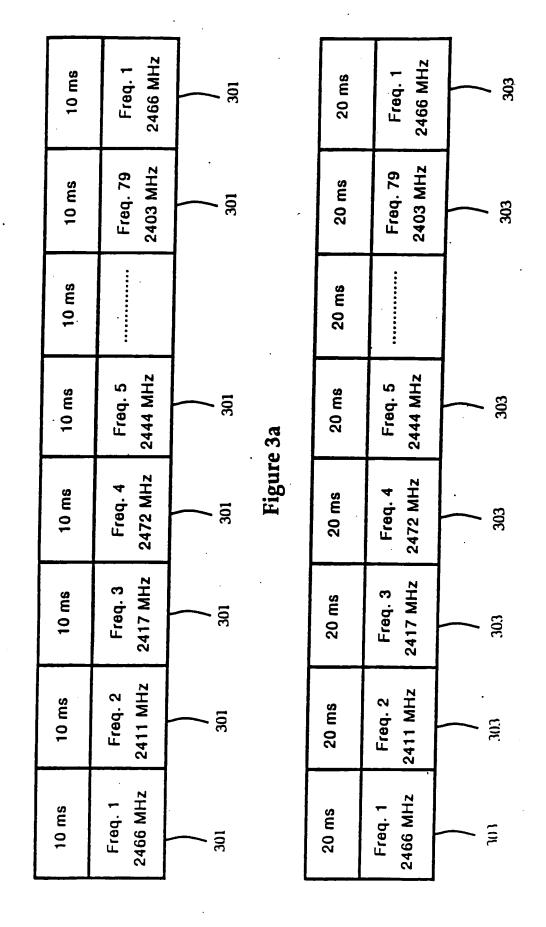


Figure 3b


Freq 5: 2444 MHz	AI. 2 20 ms
Freq	AI. 1 20 ms
417 MHz	AI. 2 20 ms
Freq 3: 2417 MHz	Al. 1 20 ms
411 MHz	AI. 2 20 ms
Freq 2: 2411 MHz	Al. 1 20 ms
466 MHz	AI. 2 20 ms
Freq 1: 2466 MHz	Al. 1 20 ms

Figure 4a

		Al. 4 20 ms
	Freq 2: 2411 MHz	AI. 3 20 ms
	Freq 2: 2	Al. 2 20 ms
		Al. 1 20 ms
		Al. 4 . 20 ms
	0 MHZ	AI. 3 20 ms
Espa 4. 040	1164 1: 2400 MHZ	AI. 2 20 ms
		Al. 1 20 ms

Figure 4b

Figure 5b

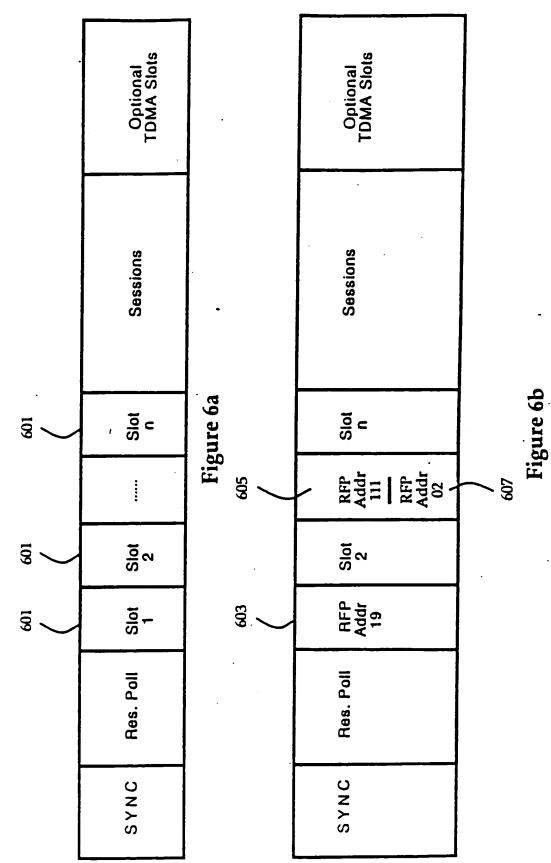

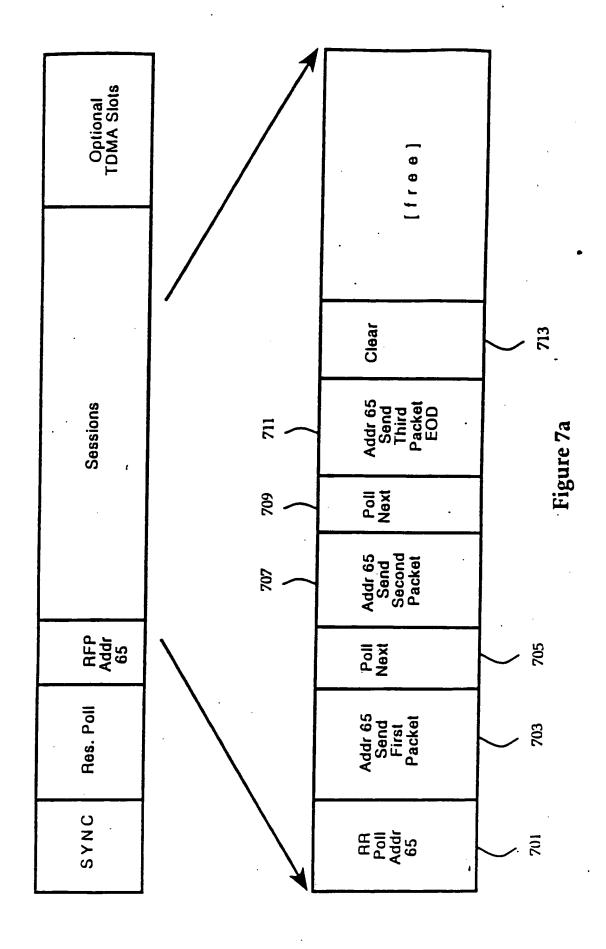
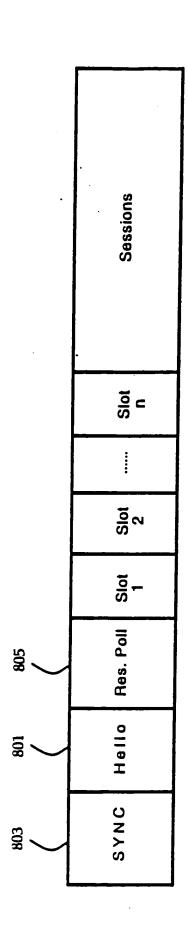
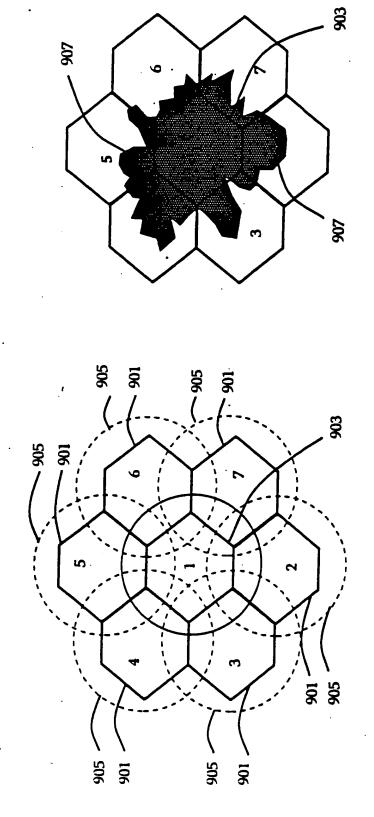
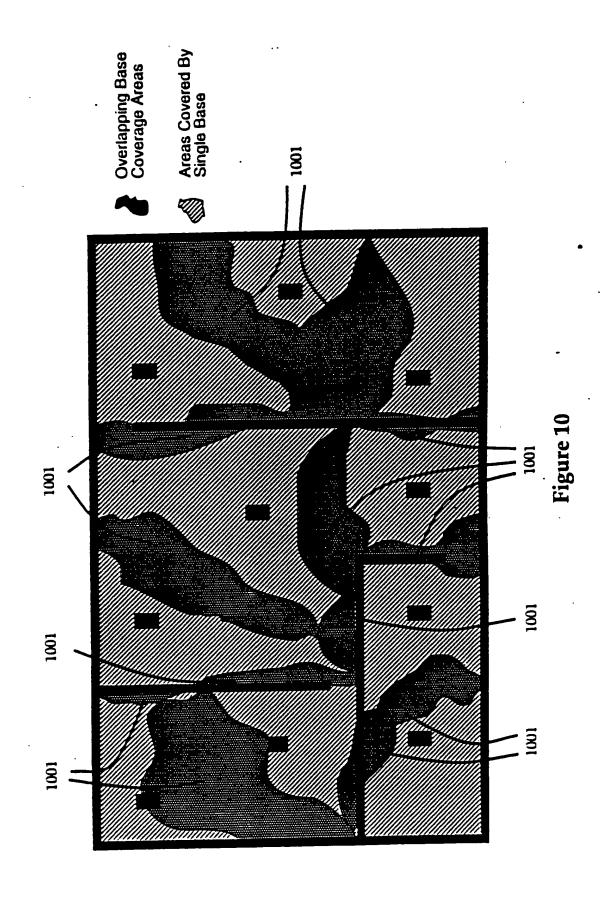
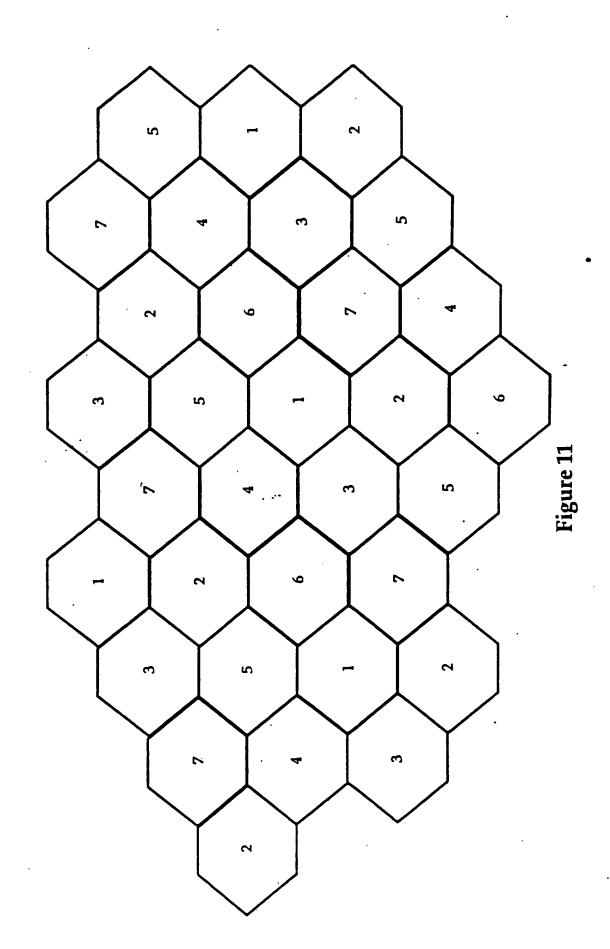


Figure 7b









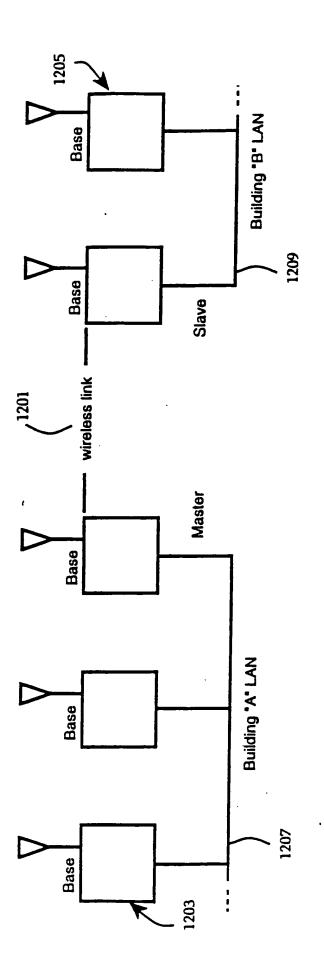


Figure 12

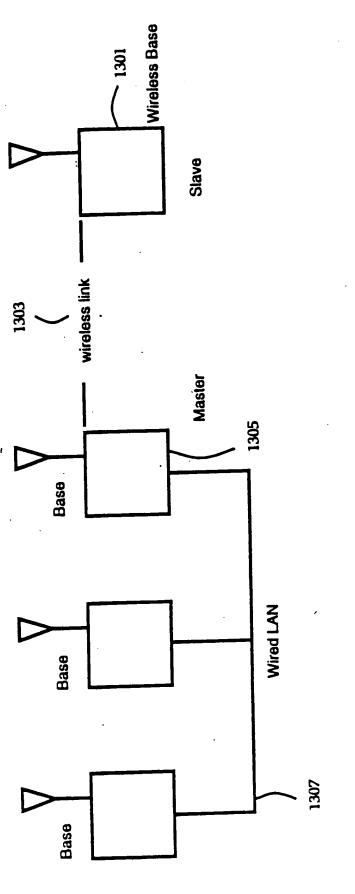
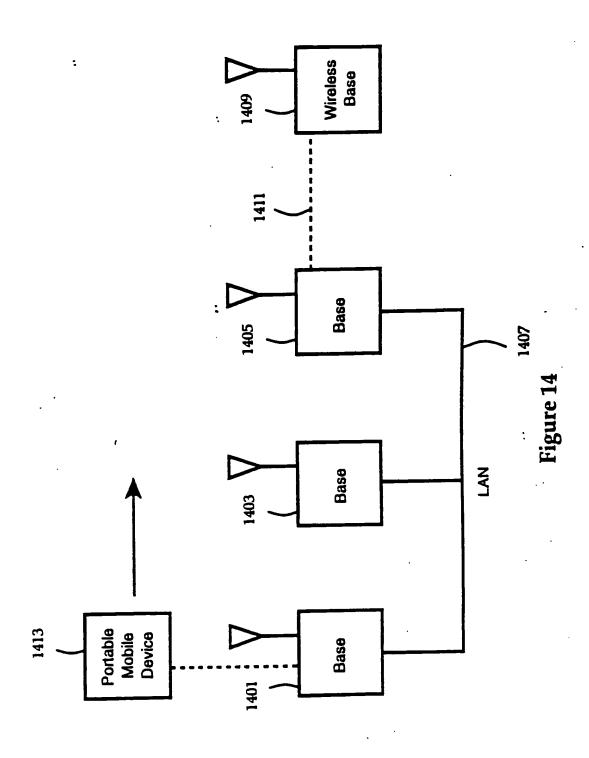


Figure 13



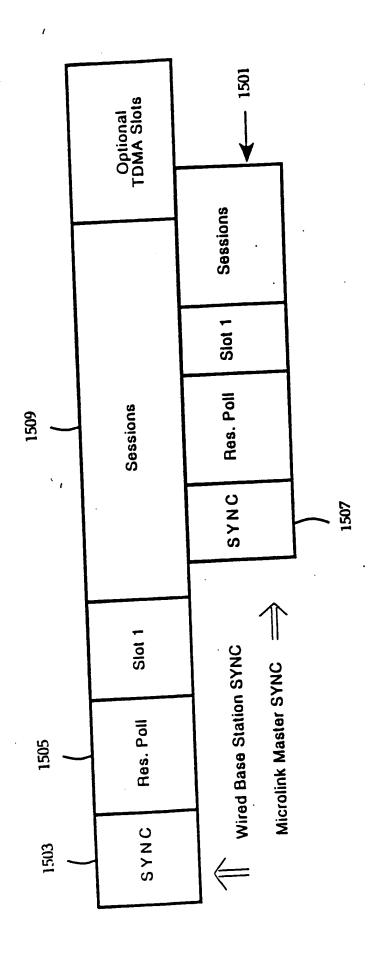


Figure 15

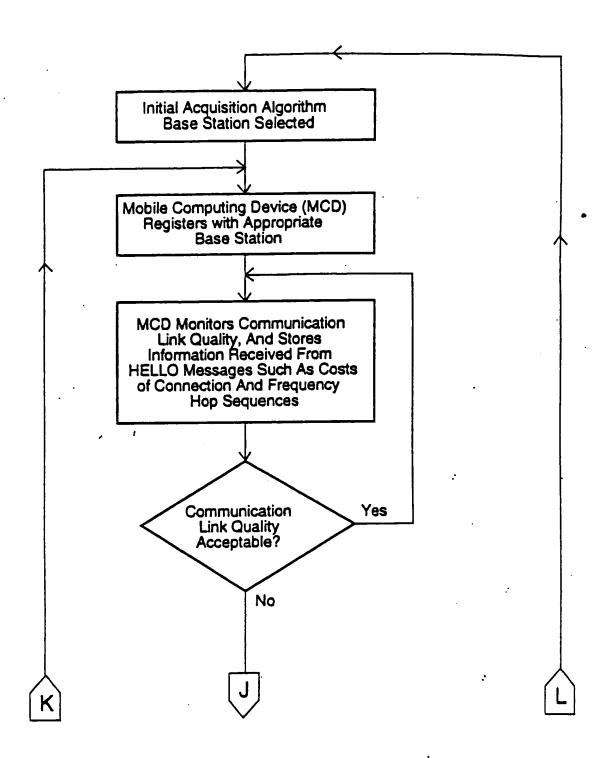
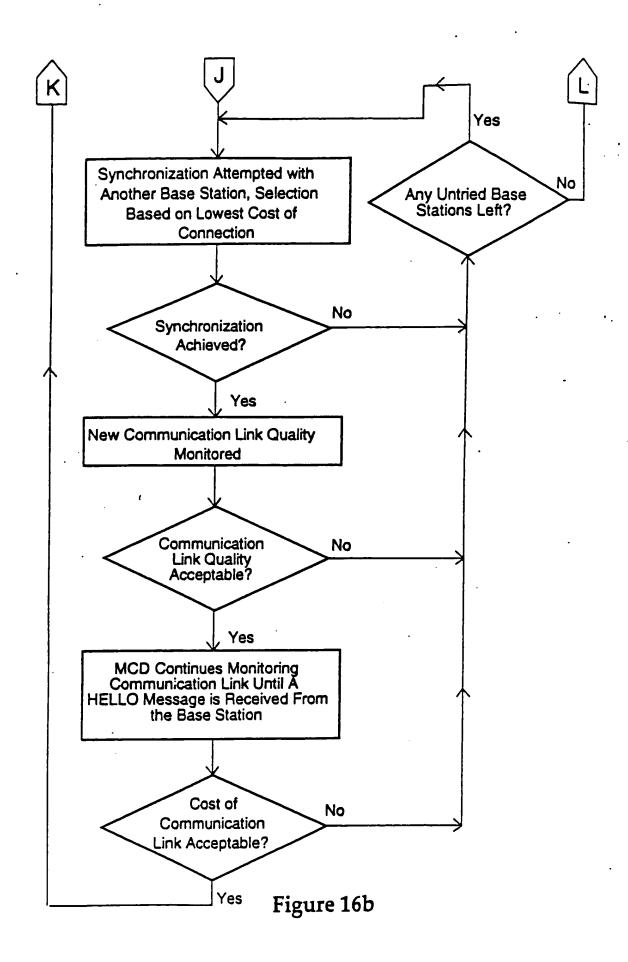


Figure 16a



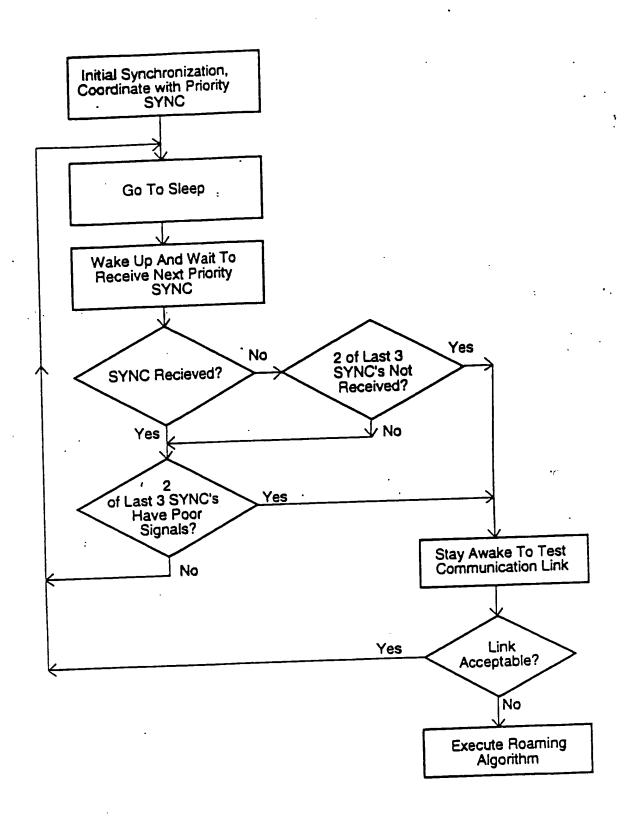
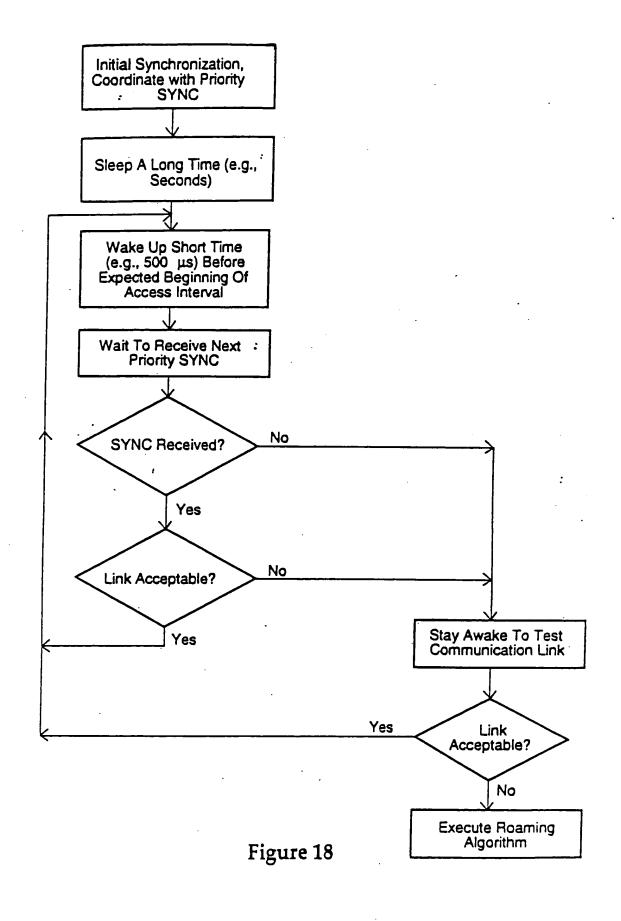
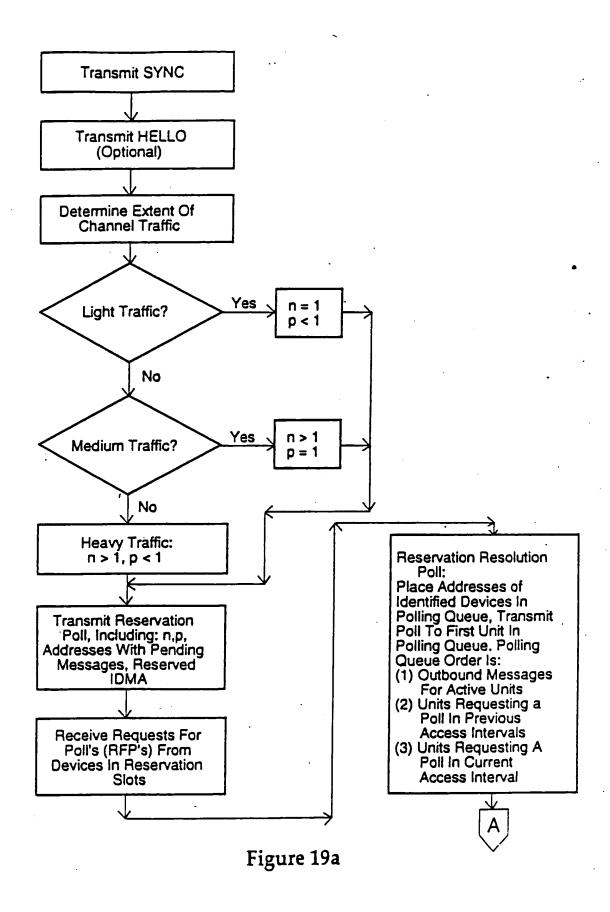


Figure 17





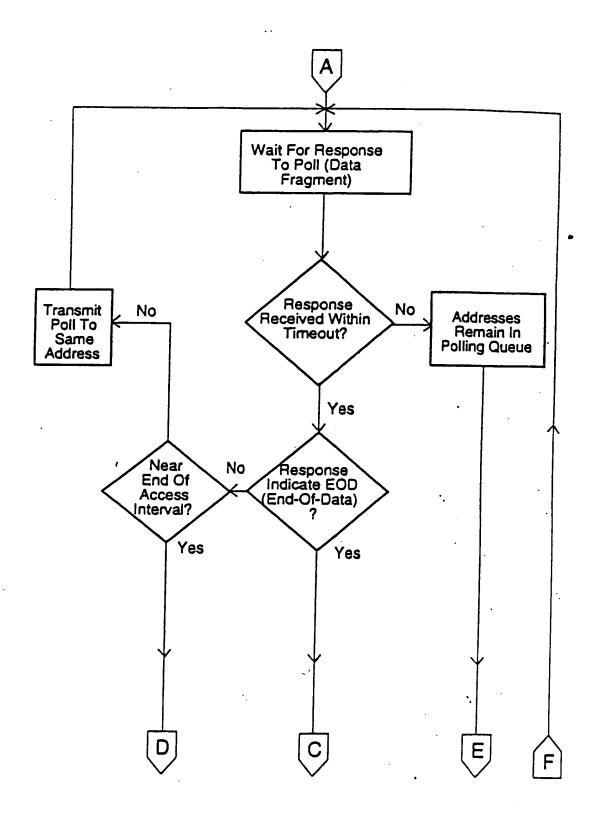


Figure 19b-1

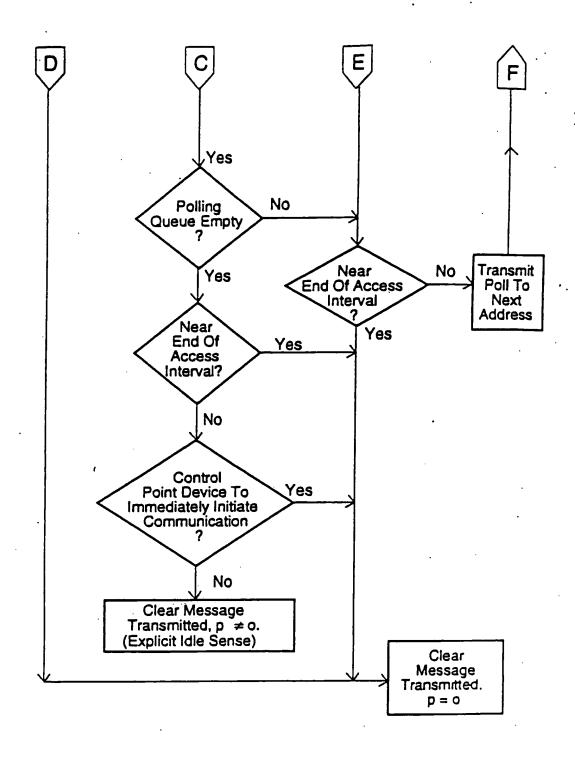


Figure 19b-2

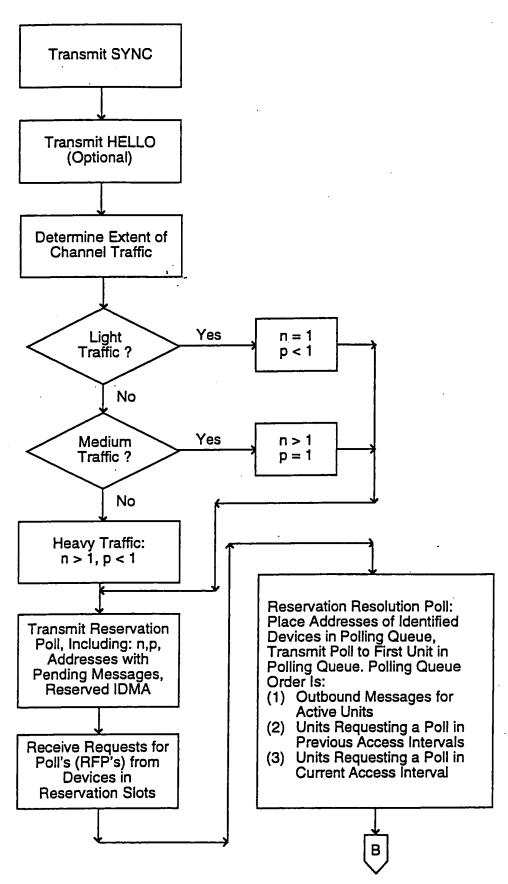


Fig. 20a

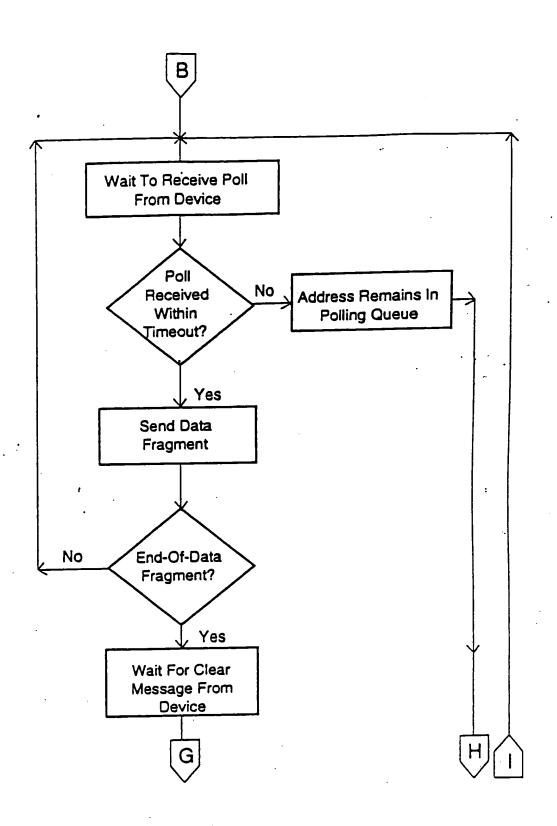


Figure 20b-1


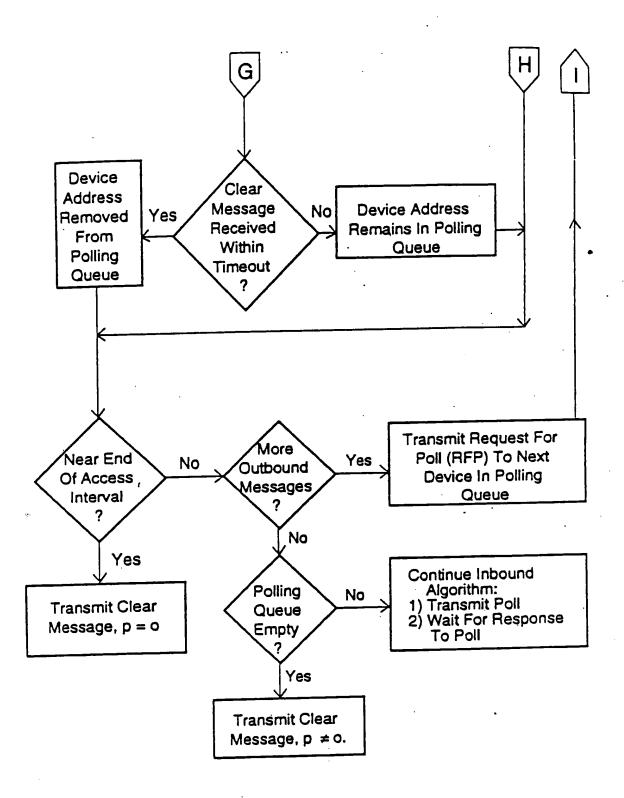


Figure 20b-2

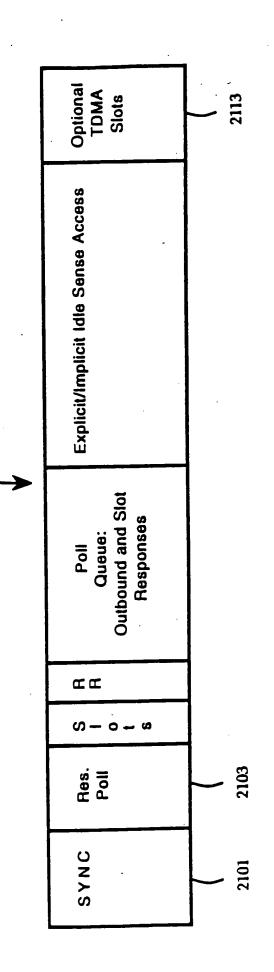

2100

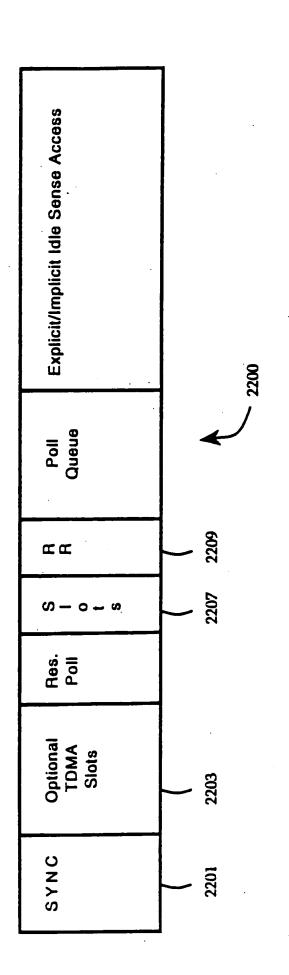


Figure 22

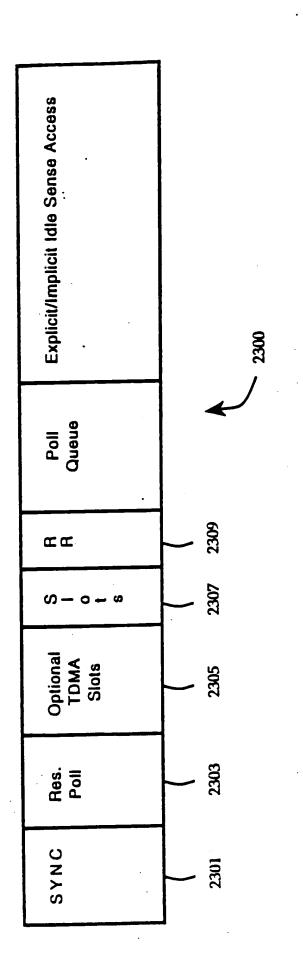


Figure 23

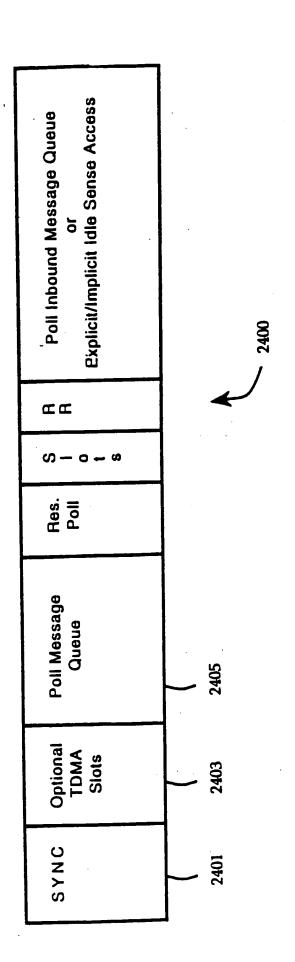


Figure 24

++ allows additional bit times for HDLC zero bit insertion

Figure 25

SYNC

Вуте	Content	Definition
1	FLAG	Frame Delimiter
2	Dest. Address 1	Destination Address (SYNC = Broadcast = FFFF <sub>H</sub> )
3	Dest. Address 2	Destination Address, 2nd Byte
4	TYPE	Message Type=SYNC, Priority Sync, or Priority SYNC with
		HELLO
5	Source Address 1	Control Point Address
9	Source Address 2	Control Point Address, 2nd Byte
7*	SYSTEM ID	System Identifier (LAN ID)
8.	NET ID	Net ID
•6	Command/Status 1	Control Point Status
		2 Bits Control Point Type
,		2 Bits Loading Factor
		1 Bit Scheduled Service Availability
		3 Bits Reserved
10-	Command/Status 2	Scheduled Services
		5 Bits Number of Allocated TDMA Time Slots
		3 Bits Number of Available Time Slots
11*	Random	Randomly Selected Character for Improved Encryption
12	CRC 1	Error Check
13	CRC 2	Error Check
14	FLAG	Frame Delimiter
,		

Figure 26


\*Optionally Encrypt d Bytes


## Reservation Poll


Definition	Frame Delimiter	Destination Address (RES = Broadcast = $FFF_H$ )	Destination Address, 2nd Byte	Message Type = RES POLL	3 Bits Number of Slots	5 Bits Probability Factor	Hopping Sequence ID	Hopping Sequence Index		3 Bits Hop Rate	2 Bits Al's per Hop	3 Bits Reserved	Error Check	Error Check	Frame Delimiter
Content	FLAG	Dest. Address 1	Dest. Address 2	TYPE	SLOT PARMS		Sequence	хөриј	NET PARMS				CRC 1	CAC 2	FLAG
Вуте	-	2	3	4	2	9	7.	₽8	•6				1.0	11	12


## Figure 27

Fig. 28A

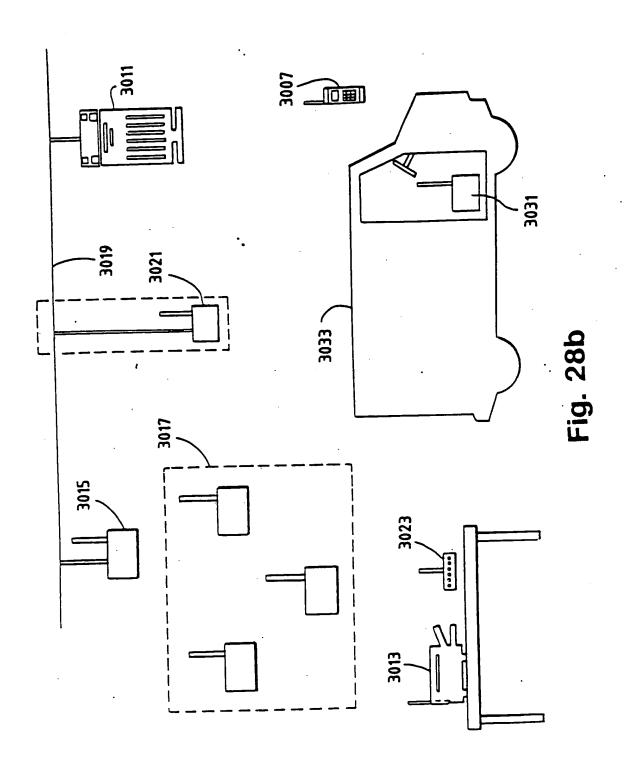

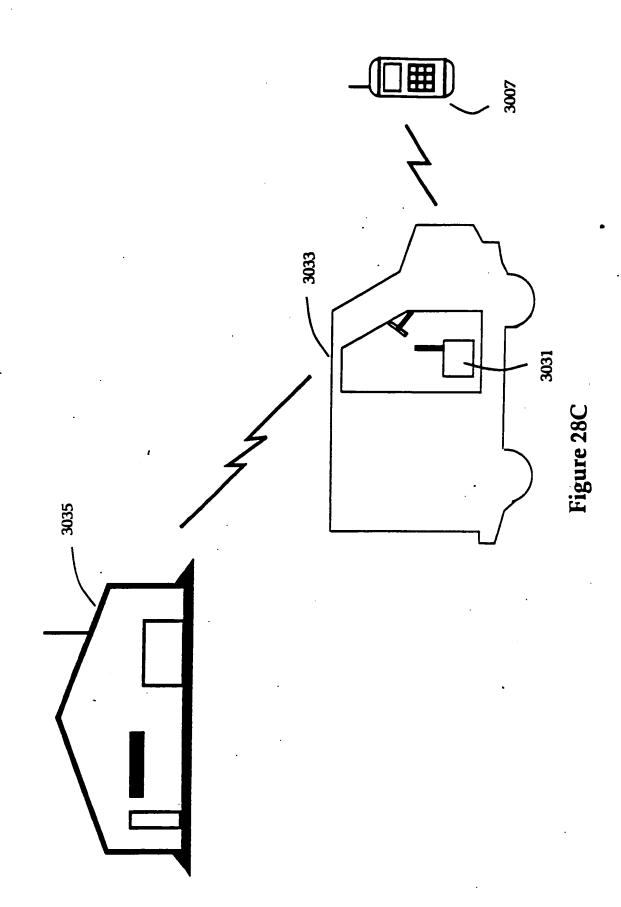

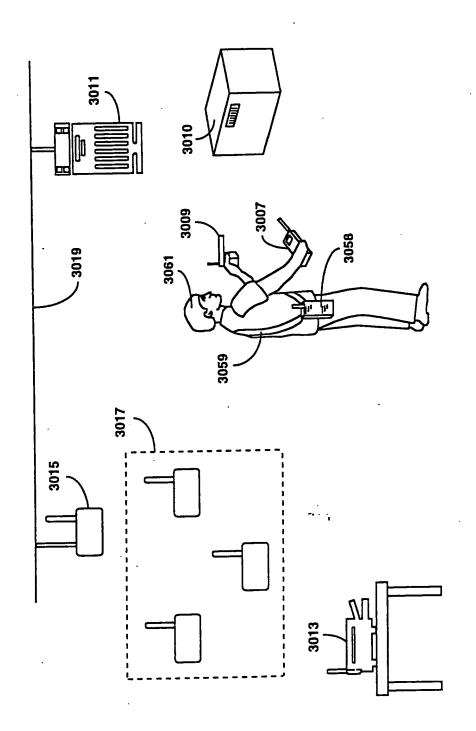

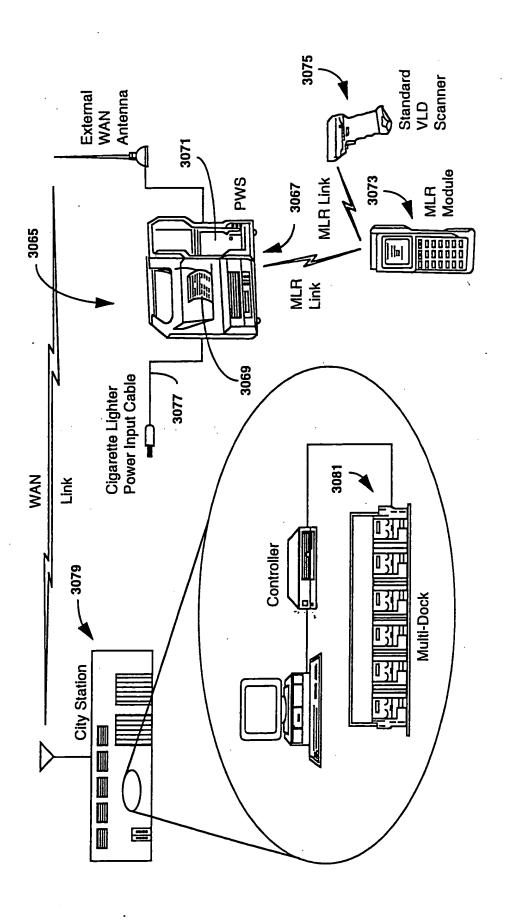

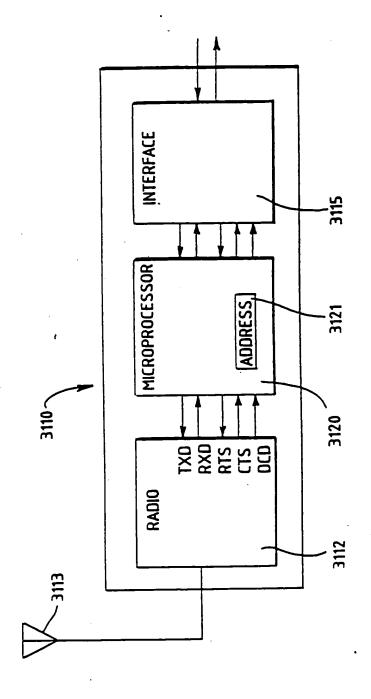


Fig. 30

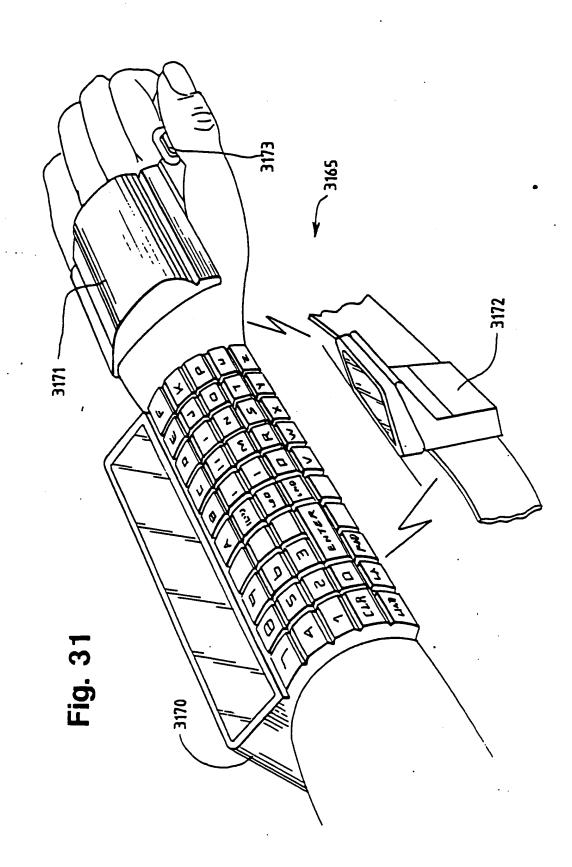
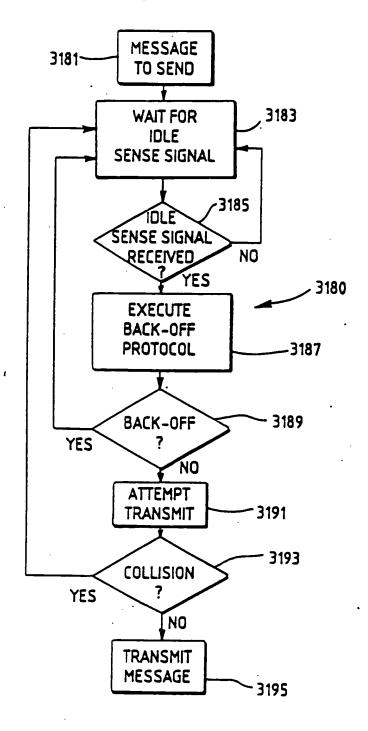


Fig. 32




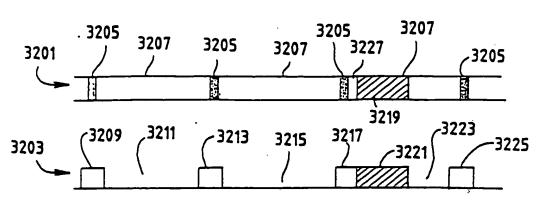


Fig. 33a

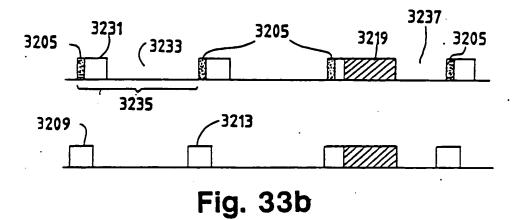

3231 3231 3231 3231 3233 3243 3245 3247 3213 3215 Fig. 33c

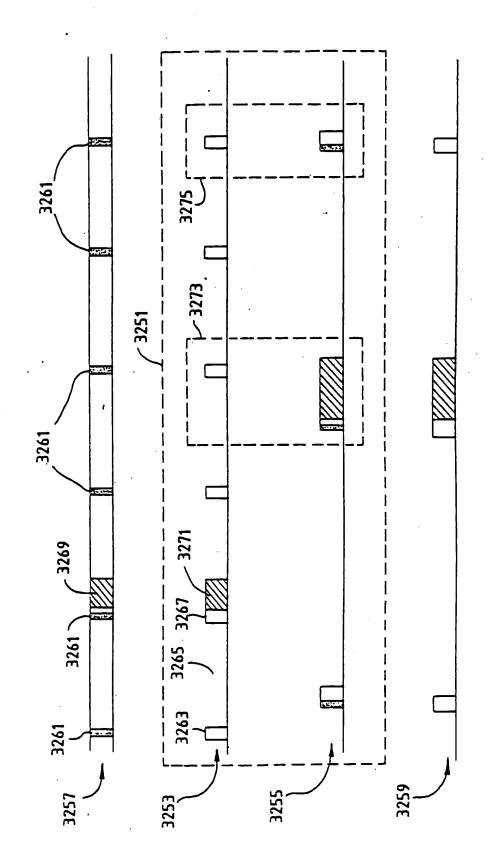


Fig. 34

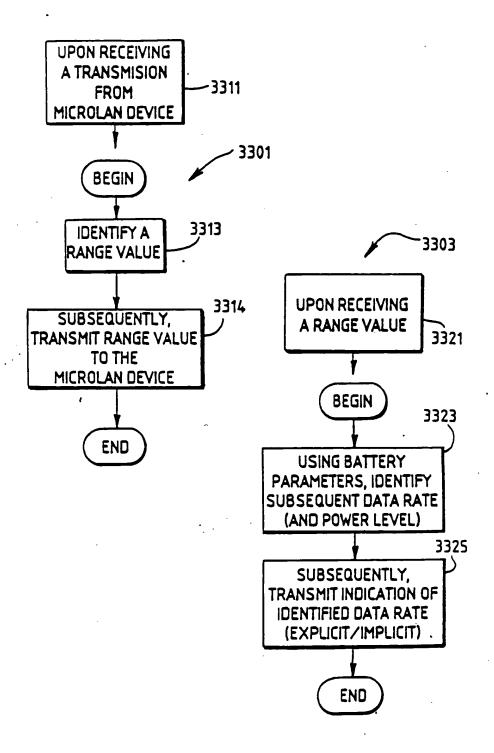
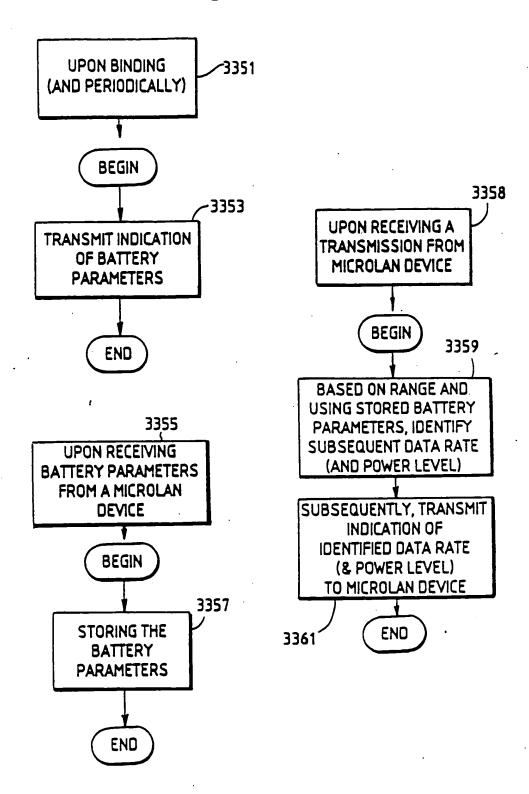


Fig. 35

Fig. 36



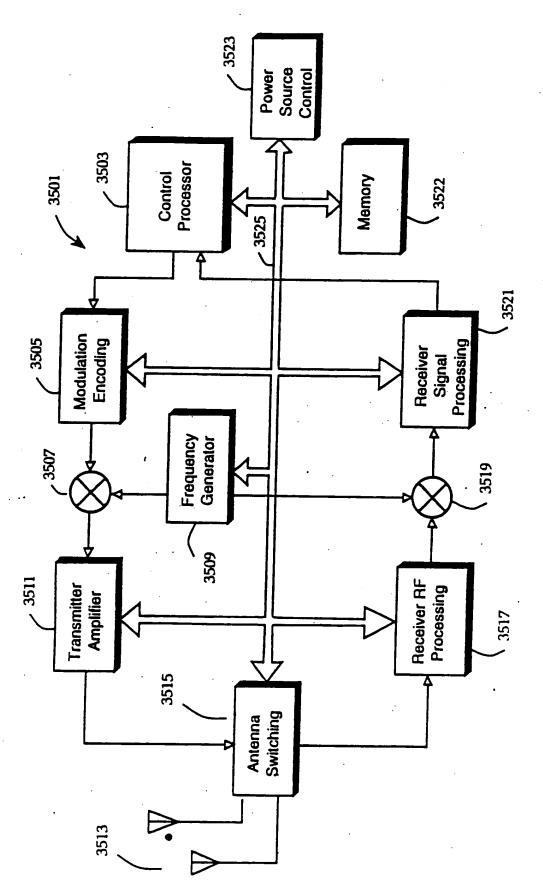


Figure 37

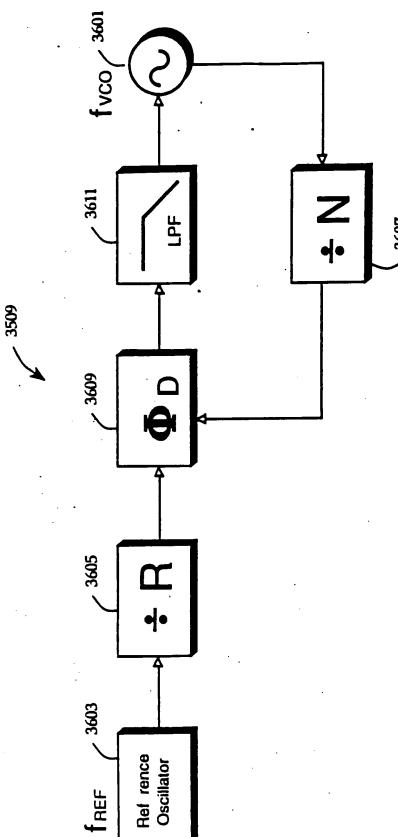


Figure 38

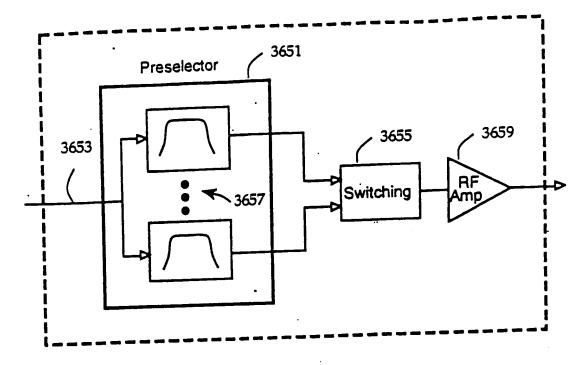


Figure 39

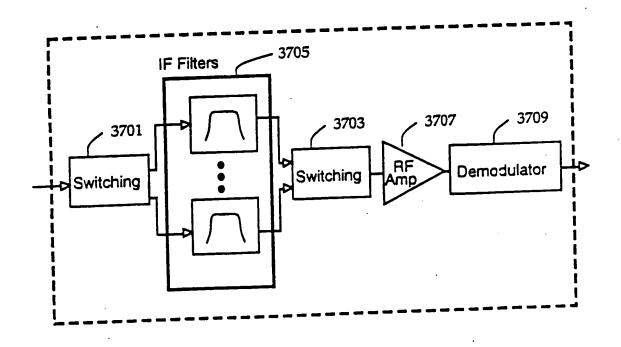


Figure 40

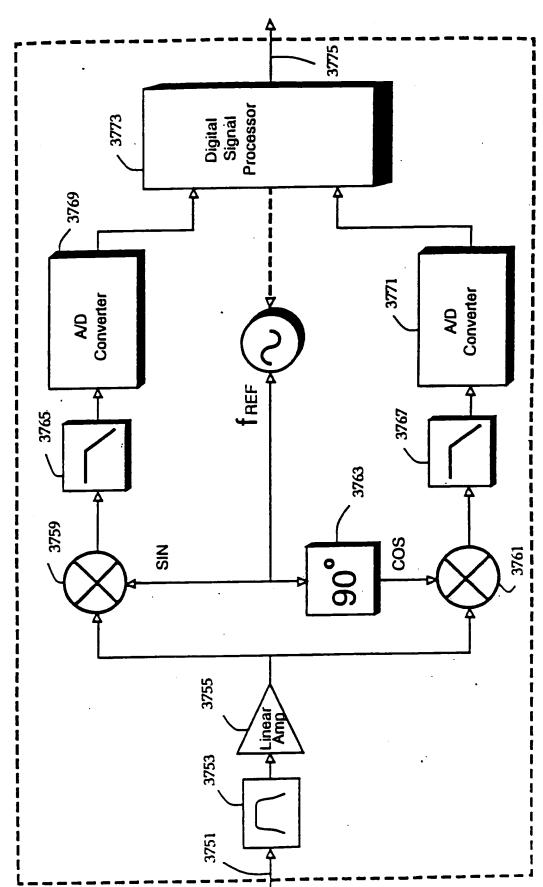


Figure 41

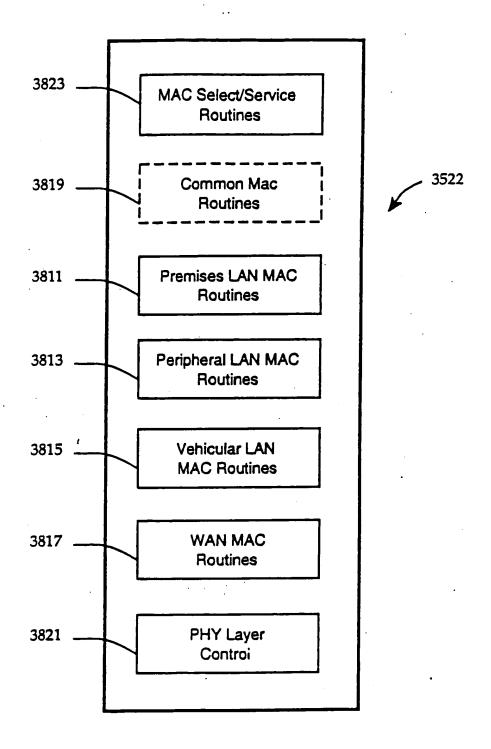


Figure 42

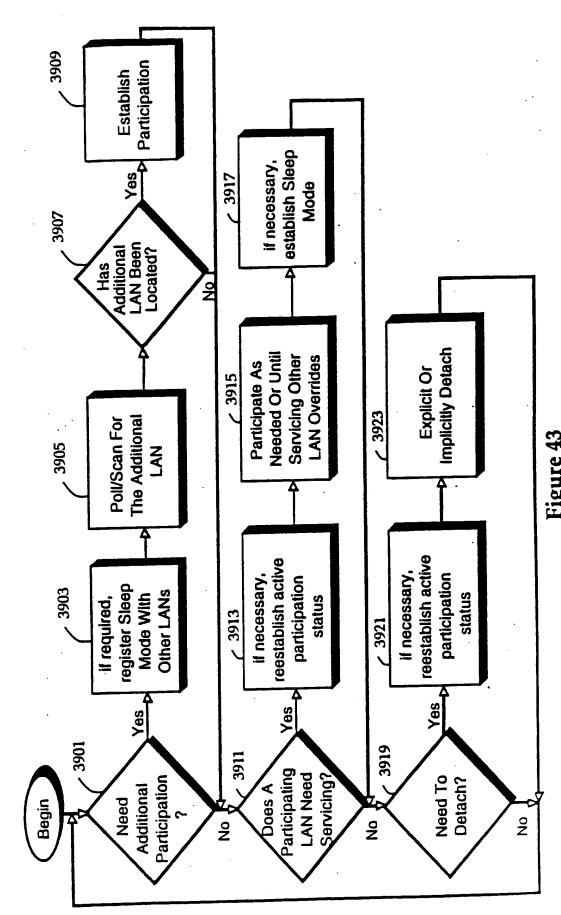


Figure 43

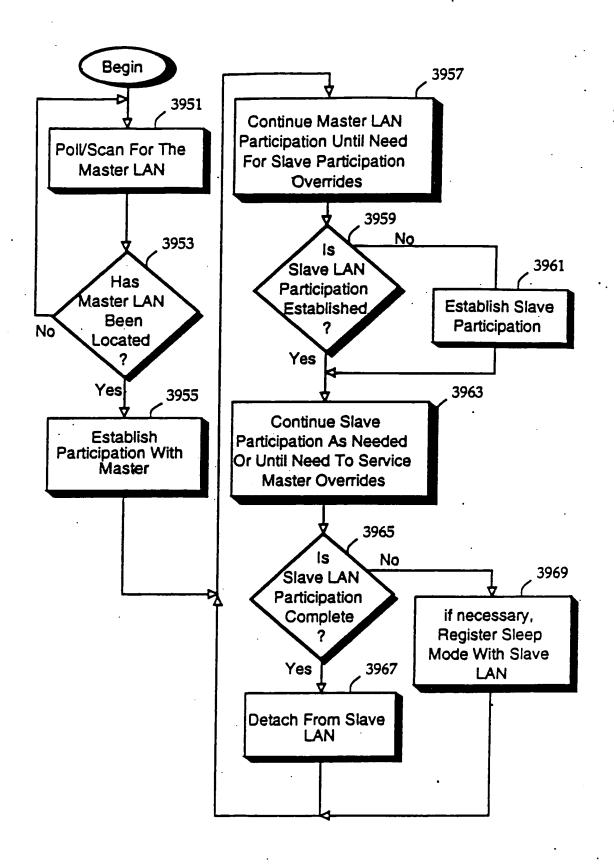


Figure 44

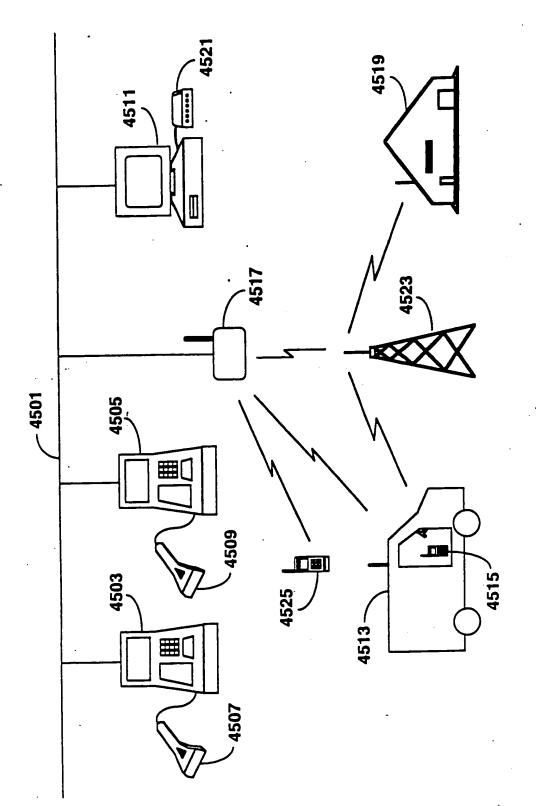


Fig. 45

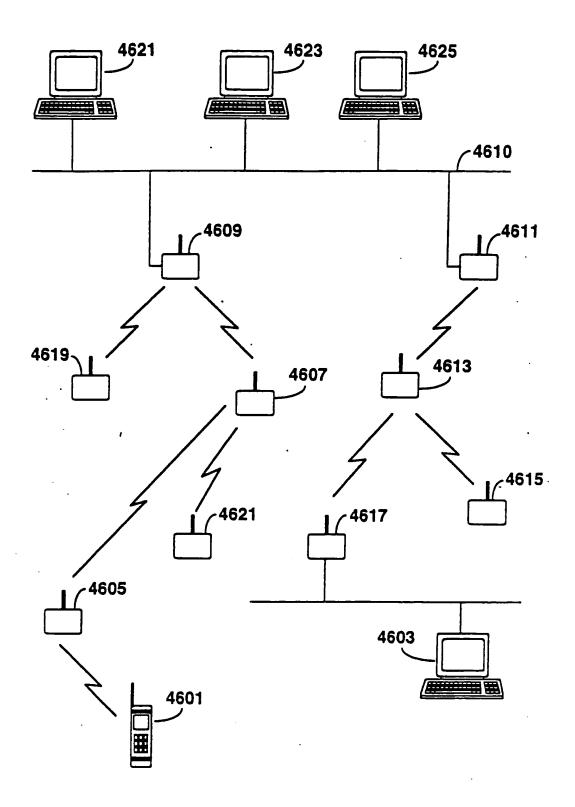


Fig. 46a

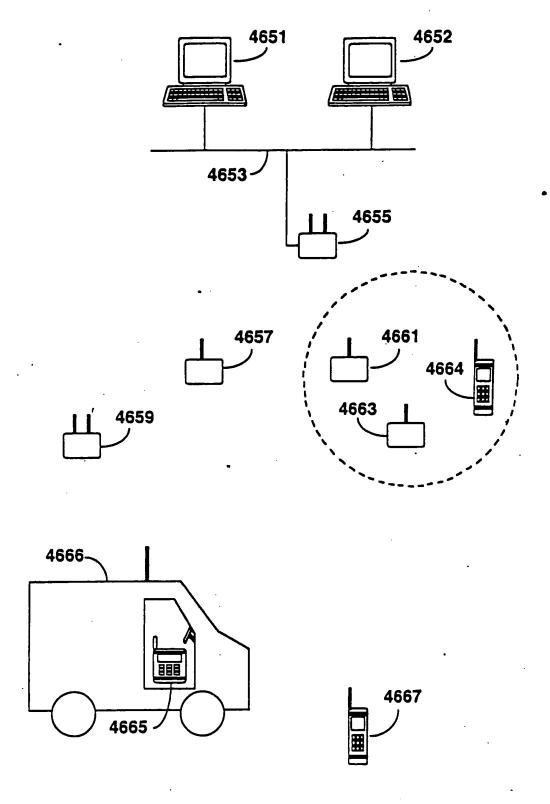


Fig. 46b

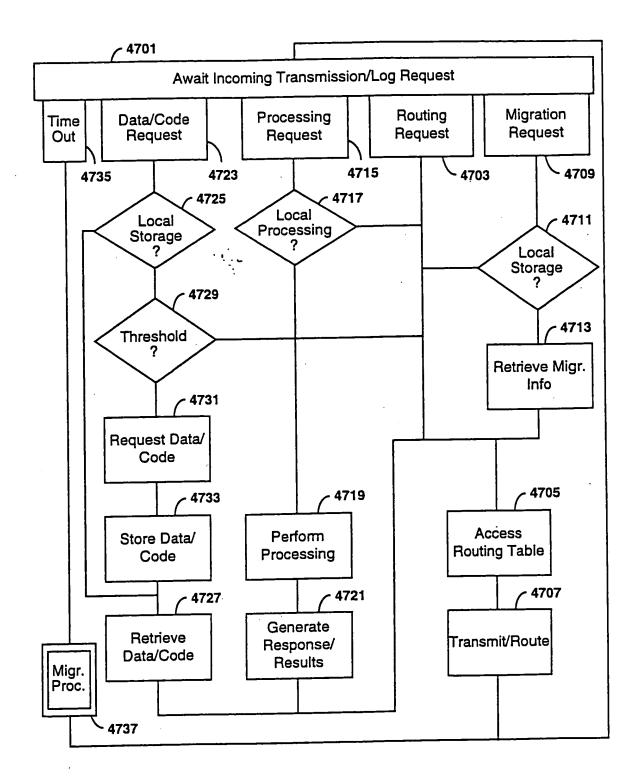


Fig. 47a


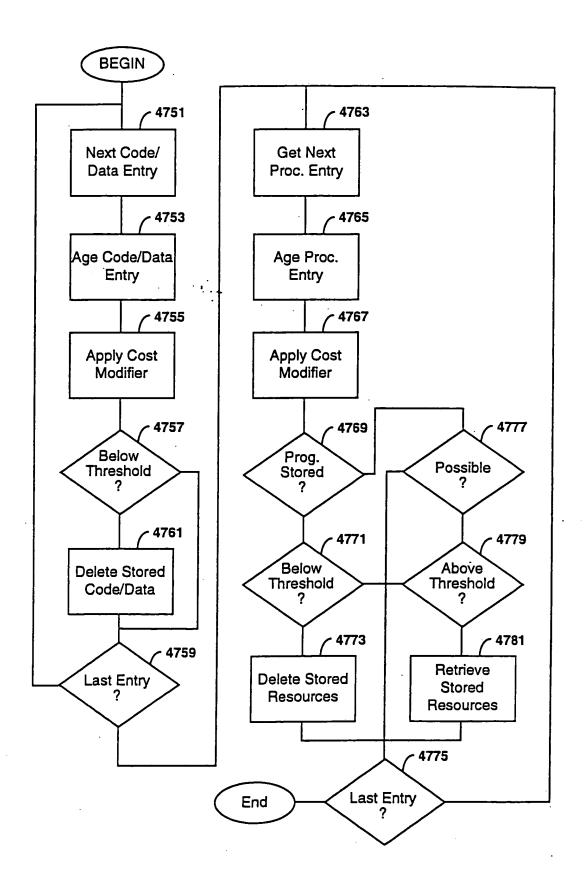


Fig. 47b

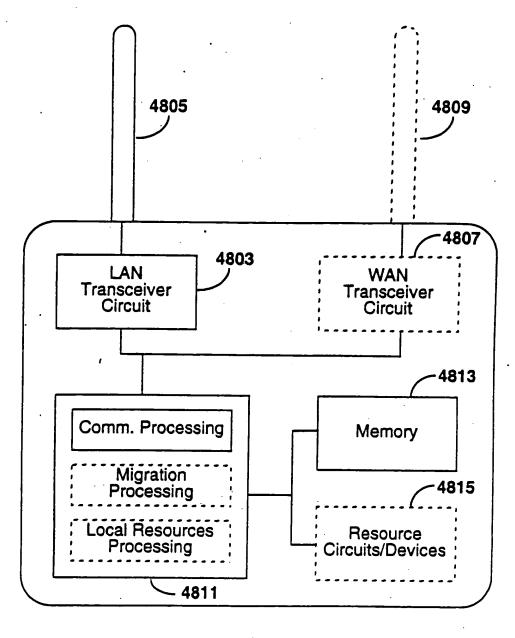

4801

Fig. 48

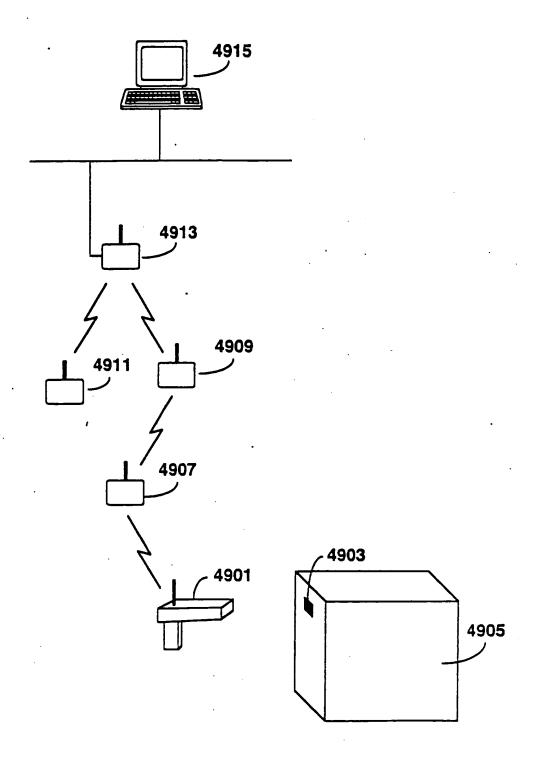


Fig. 49a

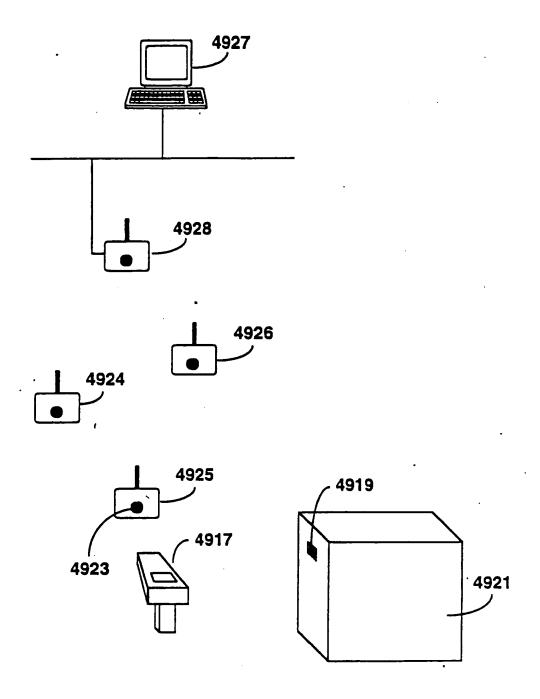


Fig. 49b

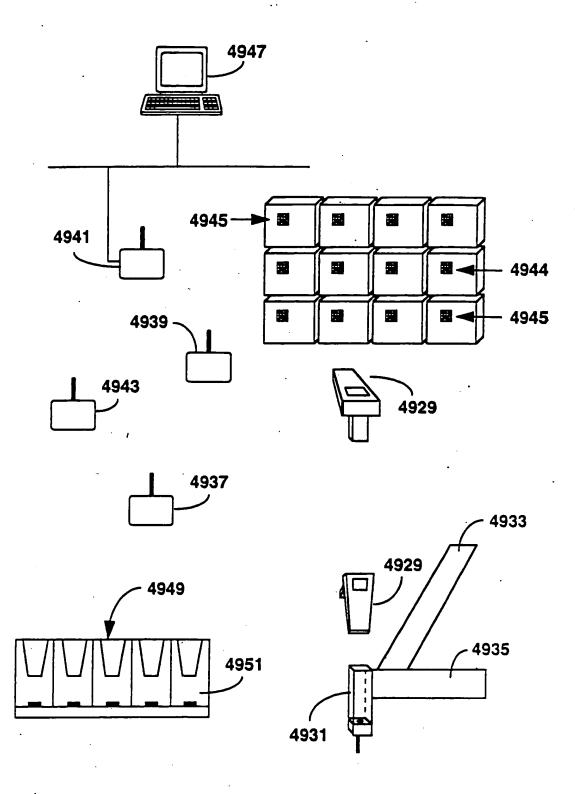


Fig. 49c

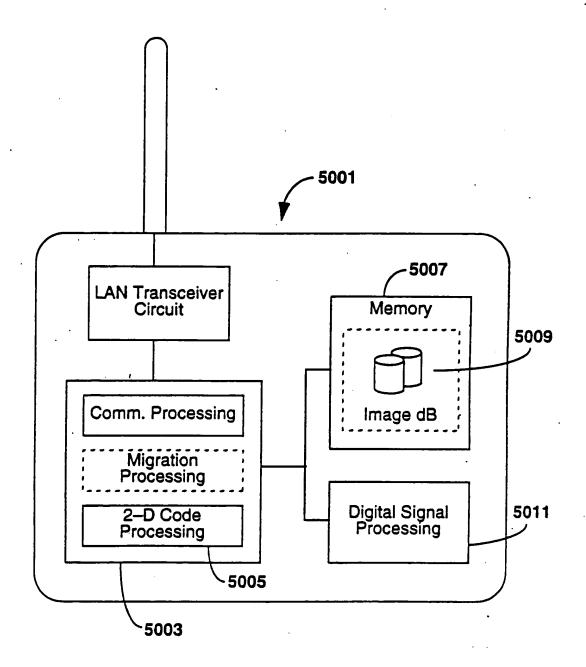


Fig. 50

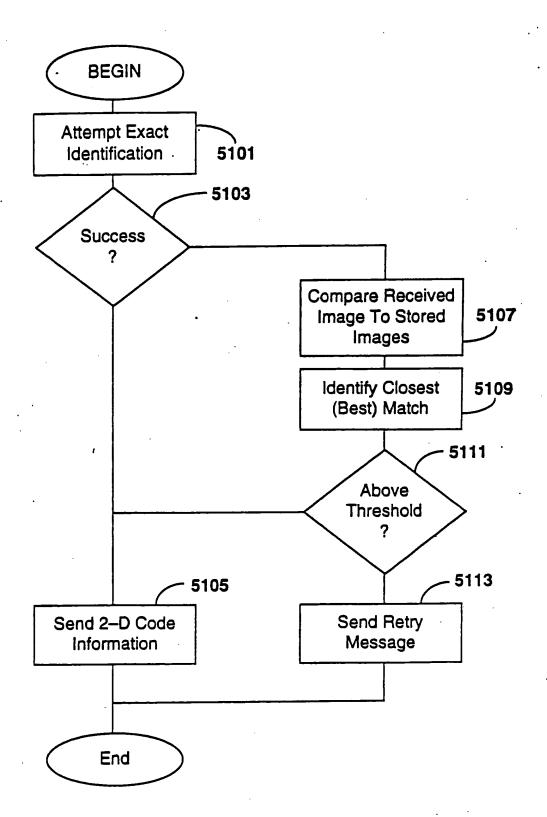


Fig. 51a

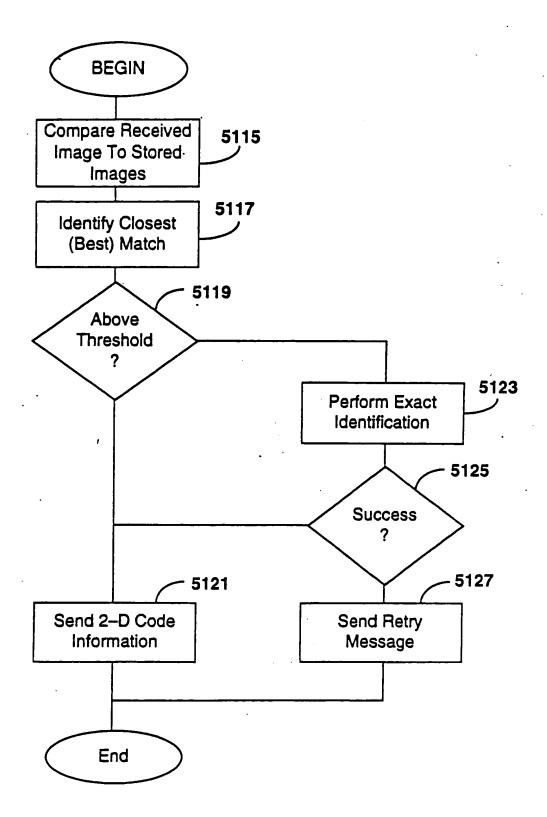
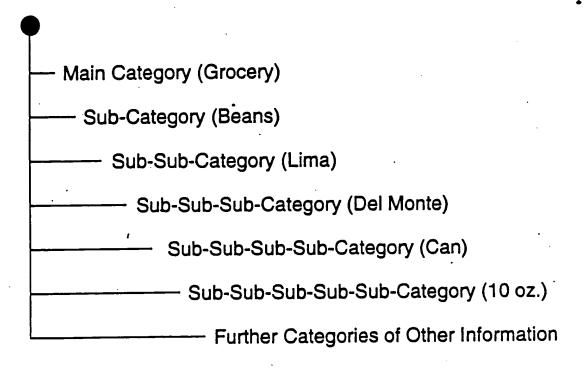


Fig. 51b



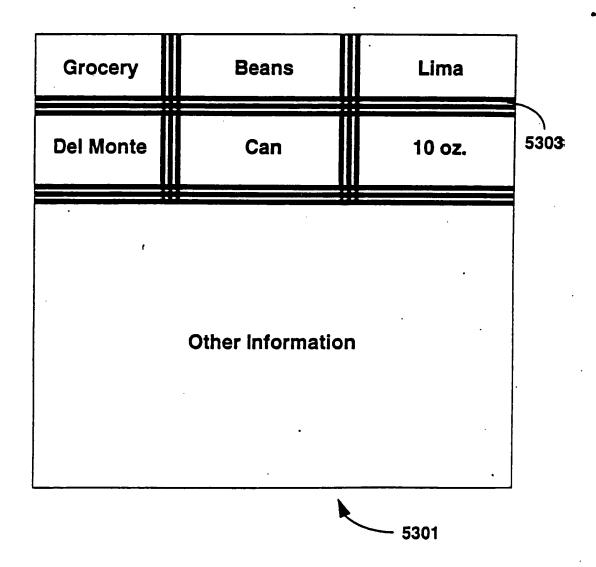


Fig. 53

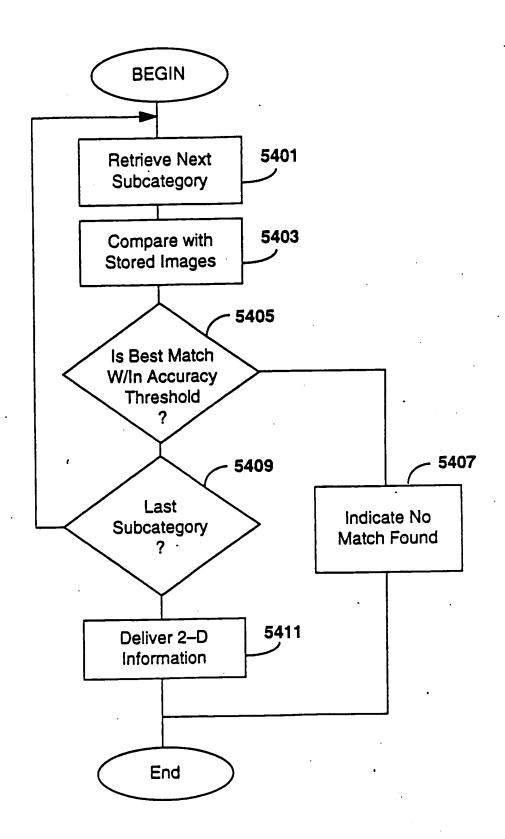


Fig. 54

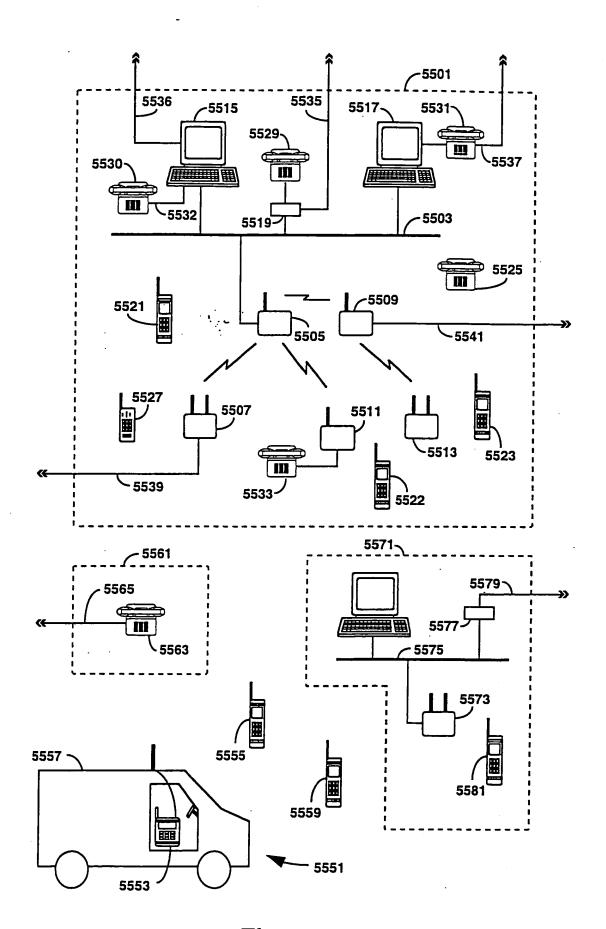


Fig. 55a

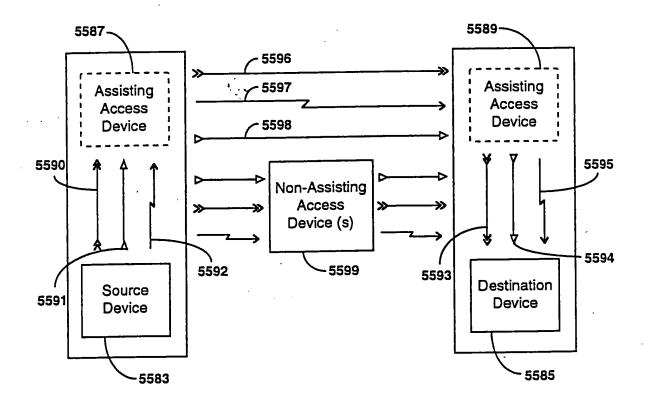


Fig. 55b

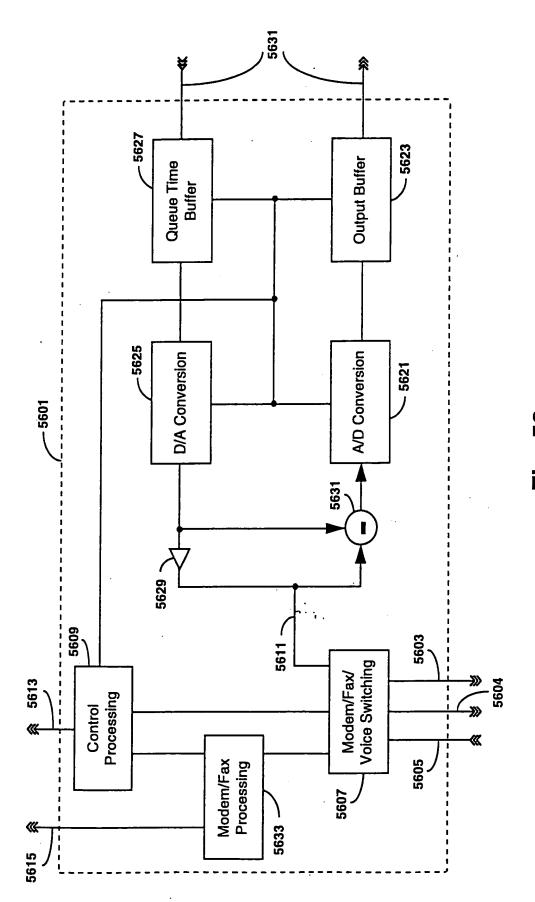


Fig. 56a

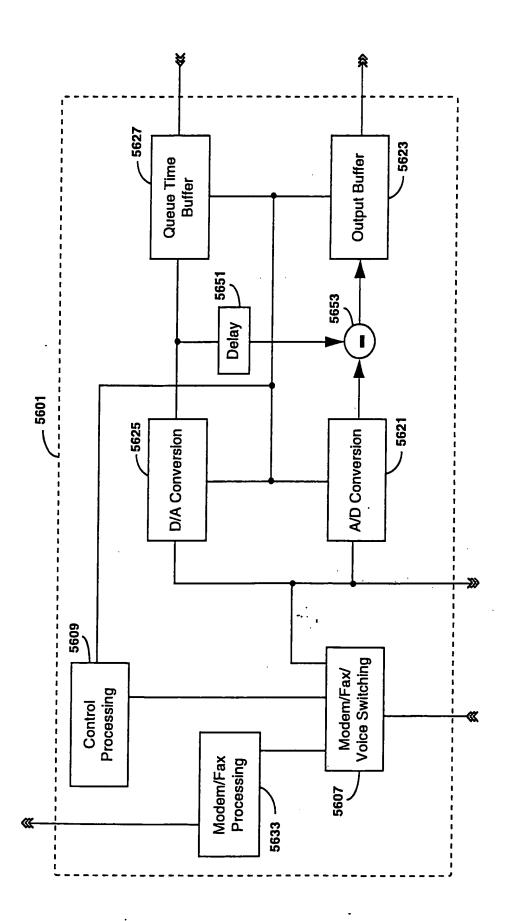


Fig. 56b

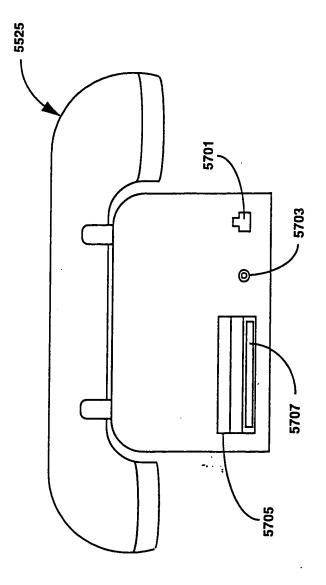


Fig. 57

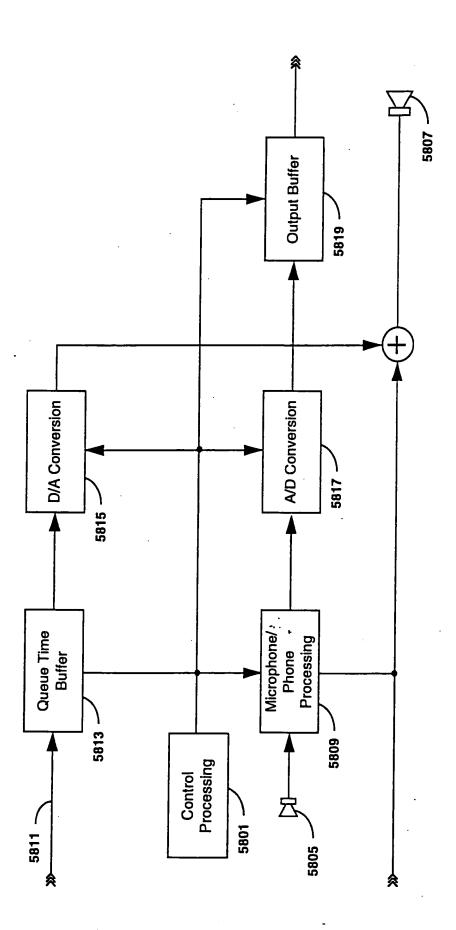


Fig. 58

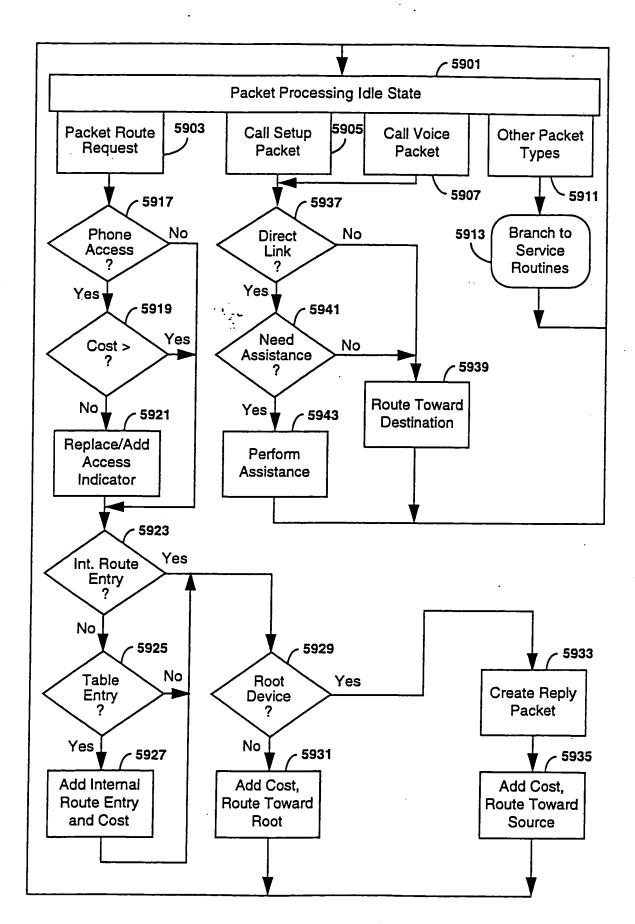


Fig. 59

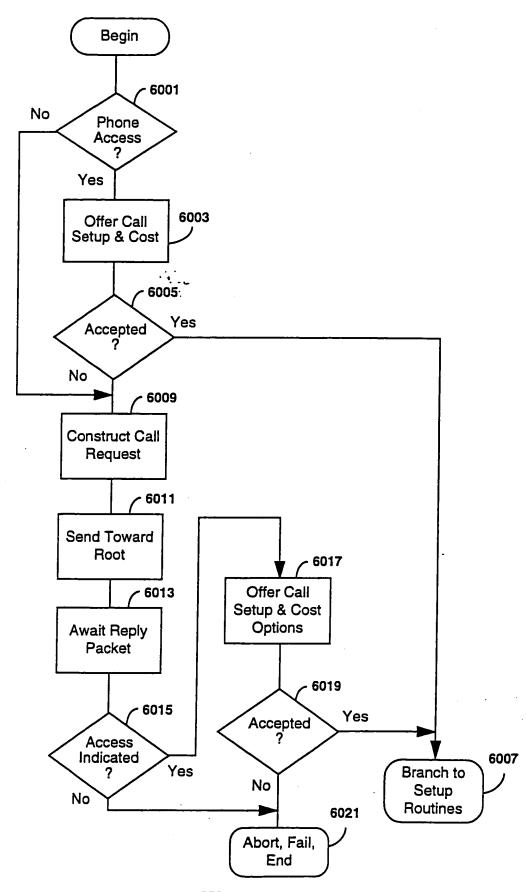


Fig. 60

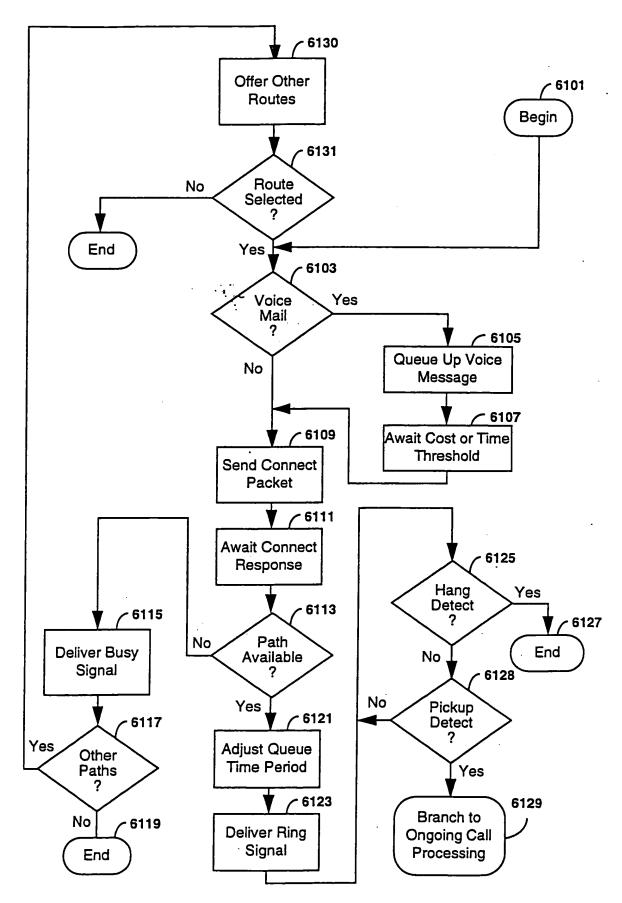


Fig. 61

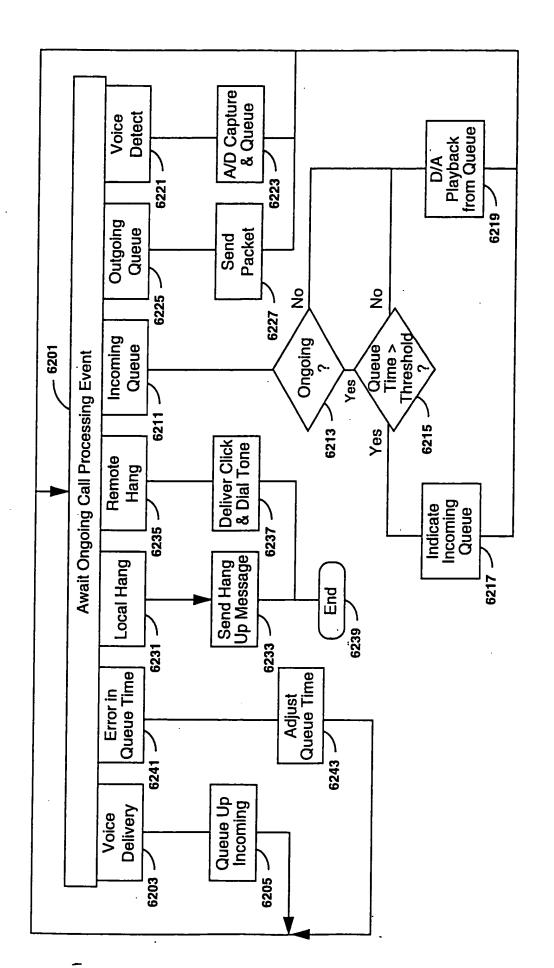


Fig. 62

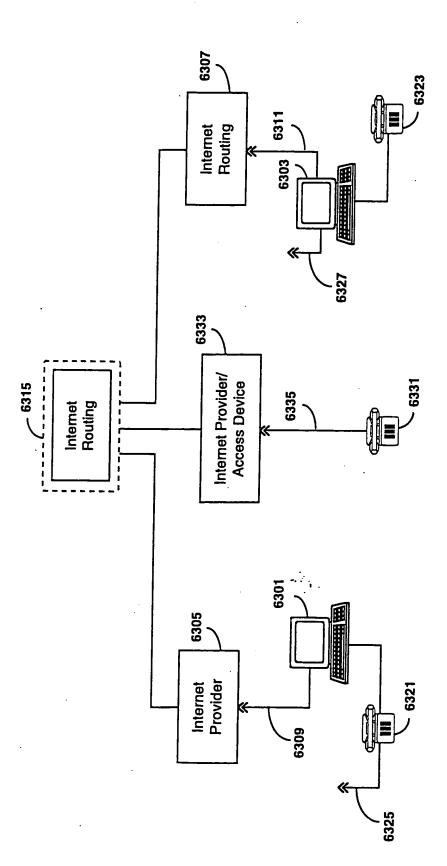


Fig. 63